





COIL DIMENSIONS (INCHES)

'A' COILS	HEIGHT	WIDTH	DEPTH
CSA/CQA1853C	12 1/2	16 1/2	19 1/2
CSA/CQA2463D	12 1/2	16 1/2	19 1/2
CSA/CQA3068D	14 1/2	16 1/2	19 1/2
CSA/CQA3672D	14 1/2	16 1/2	19 1/2
CSA4278C	17 5/8	16 1/2	19 1/2
CSA4884C	21 1/2	20	19 1/2
CSA6098C	21 3/4	21	23



'H' COILS	A	B	C	D	E	PLENUM OPENING	FURNACE FLANGE OPENING
Q/S24H	19 1/2	23 1/2	20 1/2	11 3/4	22	17 1/2 H 20 1/2 W	14 1/2 - 21"
Q/S30H	19 1/2	23 1/2	20 1/2	11 3/4	22	17 1/2 H 20 1/2 W	14 1/2 - 21"
Q/S36H	19 1/2	23 1/2	20 1/2	11 3/4	22	17 1/2 H 20 1/2 W	14 1/2 - 21"
Q/S42H	23 1/2	27 3/4	20 1/2	12 1/2	22	21 1/2 H 20 1/2 W	21 - 24 1/2"
Q/S48H	23 1/2	27 3/4	20 1/2	12 1/2	22	21 1/2 H 20 1/2 W	21 - 24 1/2"
Q/S60H	23 1/2	27 3/4	20 1/2	12 1/2	22	21 1/2 H 20 1/2 W	21 - 24 1/2"

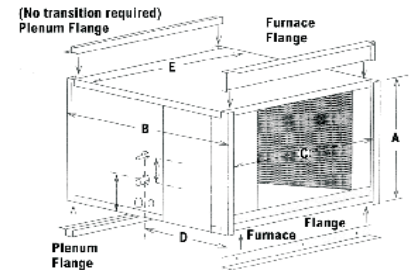

Q=DENOTES QUICK CONNECT FITTINGS H=DENOTES HORIZONTAL CONFIGURATION
 S=DENOTES SWEAT FITTINGS A=DENOTES "A" CONFIGURATION
 Q/S = EITHER FITTING AVAILABLE

'RQD' & 'RSD' CONDENSING UNIT SPECIFICATIONS									
MODEL NUMBER RSC/RQC SERIES	1018-1	1024-1	1030-1	1036-1	1042-1	1048-1	1048-3	1060-1	1060-3
RATED CAPACITY	18,000	22,400	28,600	34,000	40,000	46,000	46,000	56,000	56,000
ELECTRICAL CHARACTERISTICS	230/208/60/1						230/208/60/3	230/208/60/1	230/208/60/3
OPERATING CURRENT AMPS	9.8	10.8	11.4	17.0	20.7	26.7	16.6	29.2	18.8
COMP. RLA/LRA CURRENT AMPS	8.8/49	9.8/60	11.4/75	15.2/96	18.5/103	24.5/137	14.8/91	27/150	16.6/124
MINIMUM WIRE AMPACITY	13.0	14.5	20.0	21.7	26.4	31.8	19.3	36.0	23.0
MAXIMUM FUSE (DELAY TYPE)	20	20	30	30	35	50	30	60	35
S.E.E.R.	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
BELL RATING*	7.6	7.6	7.6	7.6	8.2	8.4	8.4	8.4	8.4
SHIPPING/ NET WEIGHT	125/119	125/119	134/128	146/139	156/148	158/150	158/150	210/199	210/199
DEPTH "D"	21 1/2	21 1/2	21 1/2	21 1/2	21 1/2	21 1/2	21 1/2	29 1/2	29 1/2
HEIGHT "H"	22 1/2	22 1/2	22 1/2	26 1/2	32 1/2	32 1/2	32 1/2	32 1/2	32 1/2
WIDTH "W"	21 1/2	21 1/2	21 1/2	21 1/2	21 1/2	21 1/2	21 1/2	29 1/2	29 1/2

* Bell rating of 7.6 arrived at by installation of sound blanket.