





COIL DIMENSIONS (INCHES)

'A' COILS	HEIGHT	WIDTH	DEPTH
Q/S24A	12 1/2	13	19 1/2
Q/S30A	12 1/2	16 1/2	19 1/2
Q/S36A	17 1/2	16 1/2	19 1/2
Q/S42A	18	16 1/2	19 1/2
Q/S48A	21 1/2	20	19 1/2
Q/S60A	21 1/2	21	23

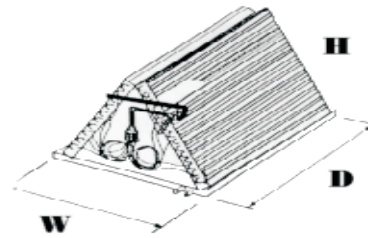

(No transition required)
Plenum Flange

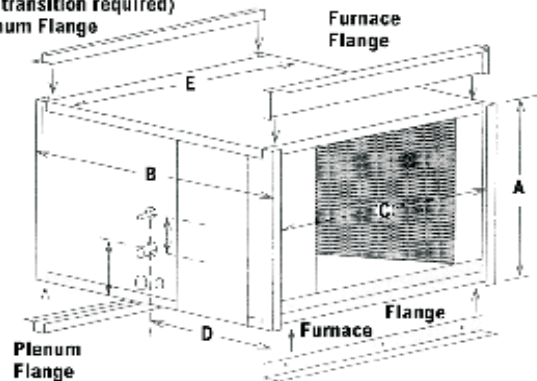

'H' COILS	A	B	C	D	E	PLENUM OPENING	FURNACE FLANGE OPENING
Q/S24H	19 1/2	23 1/2	20 1/2	11 3/4	22	17 1/2 H 20 1/2 W	14 1/2 - 21"
Q/S30H	19 1/2	23 1/2	20 1/2	11 3/4	22	17 1/2 H 20 1/2 W	14 1/2 - 21"
Q/S36H	19 1/2	23 1/2	20 1/2	11 3/4	22	17 1/2 H 20 1/2 W	14 1/2 - 21"
Q/S42H	23 1/2	27 3/4	20 1/2	12 1/2	22	21 1/2 H 20 1/2 W	21 - 24 1/2"
Q/S48H	23 1/2	27 3/4	20 1/2	12 1/2	22	21 1/2 H 20 1/2 W	21 - 24 1/2"
Q/S60H	23 1/2	27 3/4	20 1/2	12 1/2	22	21 1/2 H 20 1/2 W	21 - 24 1/2"

Q=DENOTES QUICK CONNECT FITTINGS H=DENOTES HORIZONTAL CONFIGURATION
S=DENOTES SWEAT FITTINGS A=DENOTES "A" CONFIGURATION
Q/S = EITHER FITTING AVAILABLE

'RSC' & 'RQC' CONDENSING UNIT SPECIFICATIONS

MODEL NUMBER RSC/RQC SERIES	1018	1024	1030	1036	1042	1048-1	1048-3	1060-1	1060-3	1060-5
RATED CAPACITY	18,000	22,400	28,600	34,000	40,000	47,000	47,000	57,000	57,000	57,000
ELECTRICAL CHARACTERISTICS	230/208/60/1						230/208/60/3	230/208/60/1	230/208/60/3	575/60/3
OPERATING CURRENT AMPS	9.8	10.8	11.4	17.0	20.7	26.7	16.6	29.2	18.8	9.0
COMP. RLA/LRA CURRENT AMPS	8.8/49	9.8/56	10.4/75	15.2/96	18.5/103	24.5/131	14.8/91	27/150	16/124	8.0/59
MINIMUM WIRE AMPACITY	13.0	14.5	20.0	21.7	26.4	31.8	19.3	36.0	23.0	12.0
MAXIMUM FUSE (DELAY TYPE)	20	20	30	30	35	50	30	60	35	15
S.E.E.R.	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
BELL RATING*	7.6	7.6	7.6	7.6	8.2	8.4	8.4	8.4	8.4	8.4
SHIPPING/ NET WEIGHT	125/119	125/119	134/128	146/139	156/148	158/150	158/150	199/190	199/190	199/190
DEPTH "D"	21 1/2	21 1/2	21 1/2	21 1/2	21 1/2	21 1/2	21 1/2	29 1/2	29 1/2	29 1/2
HEIGHT "H"	22 1/2	22 1/2	22 1/2	26 1/2	32 1/2	32 1/2	32 1/2	32 1/2	32 1/2	32 1/2
WIDTH "W"	21 1/2	21 1/2	21 1/2	21 1/2	21 1/2	21 1/2	21 1/2	29 1/2	29 1/2	29 1/2

* Bell rating of 7.6 arrived at by installation of sound blanket.